




Product Specifications

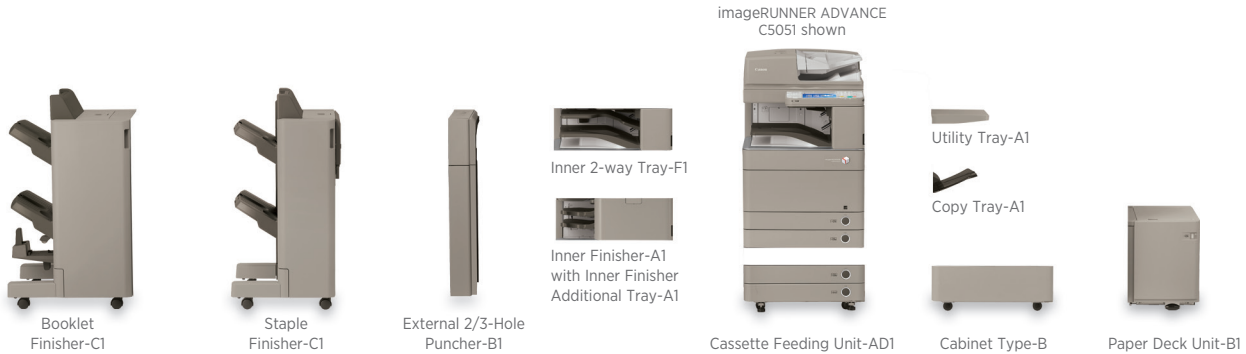

Main Unit

System Type

Color Digital Multifunction Imaging System

Functions

Standard: Copy, Print (UFR II), Scan, Send, Store

Optional: Print (PCL, Adobe® PostScript® 3™), Fax (Up to 4 Lines)

Operation Panel

8.4" SVGA Full-color, TFT Screen

Memory

Standard: 2GB RAM

Maximum: 2.5GB RAM

Hard Disk Drive

Standard: 80GB

Maximum: 250GB

Mirroring Hard Disk Drive

Optional (80GB, 250GB) Method: RAID1

Network Interface Connection

Standard: 10/100/1000Base-TX

Optional: Wireless LAN (IEEE 802.1x)

Other Interface

Standard: USB 2.0 (Host)x2, USB 2.0 (Device)

Optional: Device Port [USB 2.0 (Host)x2], Serial Interface, Copy Control Interface

Copy/Print Speed (BW/Color)

Letter: C5051: Up to 51/51 ppm
C5045: Up to 45/45 ppm
C5035: Up to 35/35 ppm
C5030: Up to 30/30 ppm

Legal/11" x 17": C5051/C5045: Up to 26/26 ppm
C5035/C5030: Up to 18/18 ppm

Paper Sources (20 lb. Bond)

Standard: Dual 550-sheet Cassettes
100-sheet Stack Bypass

Optional: Dual 550-sheet Cassettes
2,700-sheet Paper Deck

Maximum: 5,000 Sheets

Output Paper Capacity (20 lb. Bond)

Standard: 250 Sheets (Inner Tray)

Maximum: 3,100 Sheets (with Staple Finisher or Booklet Finisher)

Output Paper Sizes

Cassettes: 12" x 18",* 11" x 17",* Legal, Letter, Letter-R, Statement-R, Executive, Custom Size [5-1/2" x 7-1/8" to 12" x 18" (139.7mm x 182mm to 305mm x 457mm)]

Bypass: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-1/2" to 12-5/8" x 18" (99mm x 140mm to 320mm x 457mm)]

Paper Deck: Letter

Other Options: Envelope Feeder Attachment** (COM10 No.10, Monarch, DL, ISO-B5, ISO-C5) Tab Feeding Attachment Kit**

Acceptable Paper Weights

Cassettes: 14 lb. Bond to 110 lb. Index (52 to 209g/m²)

Bypass: 14 lb. Bond to 140 lb. Index (52 to 256g/m²)

Duplexing

Paper Size: Standard Automatic Trayless Duplexing (Executive to 12" x 18")

Paper Weights: 14 lb. Bond to 110 lb. Index (52 to 209g/m²)

Special Media Support

Tracing, Labels, Transparency, Tab, and Envelopes

Warm-up Time

38 Seconds from Power On

C5051/C5045: 18 Seconds from Sleep Mode

C5035/C5030: 15 Seconds from Sleep Mode

Power Requirements/Plug

C5051/C5045: 120V AC, 60Hz, 20A/NEMA 5-20P

C5035/C5030: 120V AC, 60Hz, 15A/NEMA 5-15P

Power Consumption

C5051/C5045: Maximum: 1,800W; Sleep Mode: 1W

C5035/C5030: Maximum: 1,300W; Sleep Mode: 1W

Dimensions (H x W x D)

C5051/C5045: 38-5/8" x 24-3/8" x 29-7/8"

(982mm x 620mm x 760mm)

C5035/C5030: 37" x 24-3/8" x 29"

(938mm x 620mm x 735mm)

Installation Space (W x D)

C5051/C5045: 42-1/8" x 52"

(1071mm x 1319mm)

C5035/C5030: 42-1/8" x 49-5/8"

(1071mm x 1259mm)

Weight

C5051/C5045: Approx. 379 lb. (172kg)***

C5035/C5030: Approx. 342 lb. (155kg)***

Toner (Estimated Toner Yield @ 5% Coverage)

C5051/C5045: Black: 44,000 Images

Color (C,M,Y): 38,000 Images

C5035/C5030: Black: 36,000 Images

Color (C,M,Y): 27,000 Images

