

PRINTER AND LAMINATOR:	
Max. web width	42" (1,066 mm)
Print speed	5.91" or 11.81"/ second (150 or 300 mm / second)
Print resolution	HQ: 1600 x 1600 dpi
CMYKK	10L ink tanks
Dimensions	Printer module: 7.48' x 7.72' x 5.28' (2280 x 2352 x 1610 cm) Laminator: 5.25' x 7.78' x 4.76' (1600 x 2370 x 1450 cm)
Weight	Printer 2,204.62 lbs. (1000 kg) Laminator: 2,425.08 lbs. (1100 kg)
Power consumption	Printer: 3.5kW - 230VAC - 15A - 50Hz Laminaor: 10kW - 400VAC - 14.5A - 50Hz
Operation environment	Operation: 20°C / 68°F to 30°C / 86°F (25°C / 77°F recommended) Humidity: 22 to 80% RH (non-condensing)
Platform	Embedded controller and QA chips Ink delivery system with intermediary reservoirs Modular, multi-functional maintenance stations Large service door and easy ink tank access
Lamination module	Speeds up to 59' / minute Hot and cold lamination Adjustable gap between lamination rolls Possibility to set in-line the lamination module with the printing module
Interface	Unique and user-friendly software



PKG-675i + **PKG-675L**
Digital Packaging Printer + Packaging Laminator



Muratec America, Inc.
3301 East Plano Parkway, Suite 100
Plano, Texas 75074
For more information on
Muratec products or services,
call (469) 429-3300 or visit
our web site at www.muratec.com



HIGH FLEXIBILITY

Digital Packaging Printer and Laminator

THE ONLY LIMIT IS YOUR IMAGINATION



PKG-675i + **PKG-675L**
Digital Packaging Printer + Packaging Laminator





Muratec's **PKG-675i** is a digital packaging printer that can produce various applications, including printing and laminating on a range of substrates. The PKG-675i prints on flexible packaging, such as bags and pouches, and corrugated materials, such as folding cartons, displays and traditional boxes.

Manufacturers use the PKG-675i to bring both primary and secondary packaging in-house and help increase their flexibility.

The PKG-675i features five print heads and can accommodate variable widths up to 42". These features combine to bring a high level of four color quality printing to a wide range of markets.

Features of the **PKG-675i** include:

- Superior build; it's robust and reliable.
- Unique and user-friendly interface.
- Safety sensors on access doors ensure compliance with strict health and safety guidelines.
- Generous access doors make changing inks and maintenance an easy process.
- Print software allows user access to ink levels and automatic consumable alerts.
- Included high-powered desktop allows users to install variable data software and alternative RIP solutions as business needs develop and grow.

By adding Muratec's **PKG-675L** packaging laminator, products requiring full surface laminating, such as food packaging, can be brought in-house.

Laminating packaging improves the material's strength, making it more tear-resistant. It also provides protection during the distribution and storage process.


In addition, laminated packaging better protects its contents from outside elements, such as light and moisture, while preserving key qualities, such as freshness and aroma.

PKG-675i + PKG-675L

Digital Packaging Printer Packaging Laminator



Sensors measure media thickness while print heads automatically adjust.

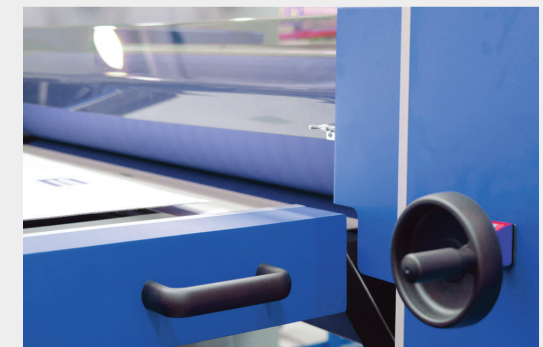

Lamination gap adjustment.



Both modules are easily accessible for maintenance.



Sensors control lamination temperature to ensure the best results.