


Product walkaround

1. Intuitive 4-line color display with 10-button keypad
2. Hardware Integration Pocket for solution integration
3. Walkup USB port
4. Built-in automatic two-sided printing
5. Convenient front on/off switch
6. 500-sheet output bin
7. One-door access to install regular or high-capacity toner cartridges
8. 100-sheet multipurpose tray 1 handles heavy custom media up to 53 lb bond
9. Two 500-sheet input trays for a 1,100-sheet total input capacity
10. HP Jetdirect 10/100/1000Base-TX Ethernet embedded print server
11. 512 MB total memory and an 800 MHz processor quickly handle complex print jobs
12. Hi-Speed USB 2.0 port



Series at a glance

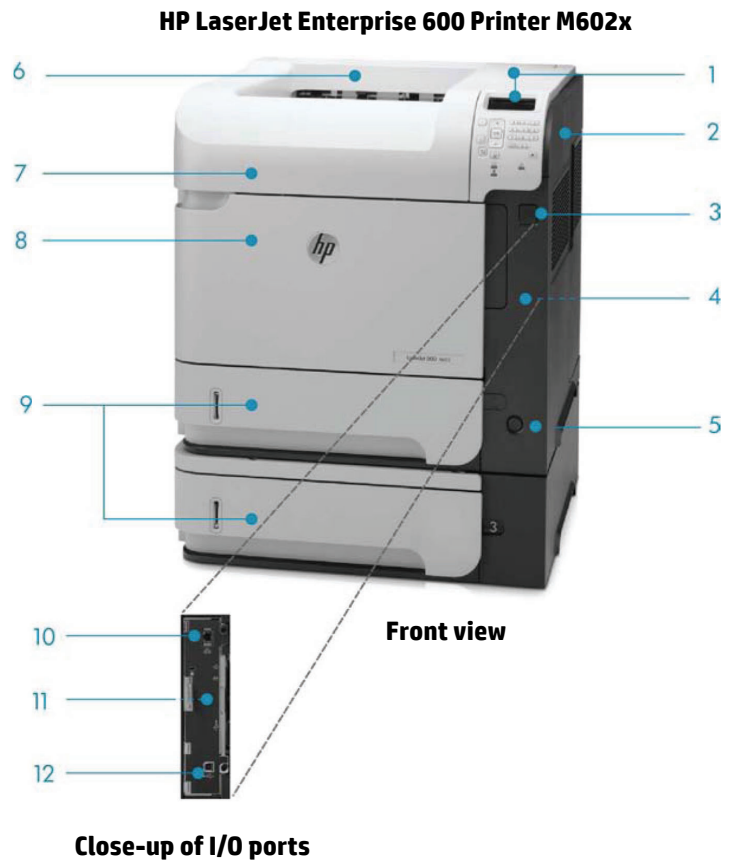

Model	HP LaserJet Enterprise 600 Printer M602n	HP LaserJet Enterprise 600 Printer M602dn	HP LaserJet Enterprise 600 Printer M602x
Part number	CE991A	CE992A	CE993A
Print speeds	Up to 52 ppm letter	Up to 52 ppm letter	Up to 52 ppm letter
Control panel	4-line color display, 10 key pad	4-line color display, 10 key pad	4-line color display, 10 key pad
Hardware integration pocket	Yes	Yes	Yes
100-sheet multipurpose tray 1	Yes	Yes	Yes
500-sheet tray 2	Yes	Yes	Yes
500-sheet tray 3	Optional	Optional	Yes
500-sheet output bin	Yes	Yes	Yes
Automatic two-sided printing unit	Optional	Yes	Yes
Toner cartridges supported	Regular (~ 10,000 pages) and high-capacity (~ 24,000 pages) ¹	Regular and high-capacity	Regular and high-capacity
HP high performance secure hard disk	Not available	Not available	Not available

¹Declared yield value for black cartridge in accordance with ISO/IEC 19752. Actual yields vary considerably based on images printed and other factors. For more information, visit hp.com/go/learnaboutsups

HP LaserJet Enterprise 600 Printer M602 series

Technical Specifications	HP LaserJet Enterprise 600 Printer M602n(CE991A)	HP LaserJet Enterprise 600 Printer M602dn(CE992A)	HP LaserJet Enterprise 600 Printer M602x(CE993A)
AIO functions	Print		
Print speed	A4: Up to 50 ppm black ¹ ; First Page Out Black: As fast as 8.5 sec. ²		
Print resolution	Black (best): Up to 1200 x 1200 dpi		
Print Technology	Laser; Print Resolution Technologies: HP ProRes 1200, HP FastRes 1200, HP RET, 600 dpi, 300 dpi		
Print Cartridges Number	1 (black)		
Standard Print Languages	HP PCL 6, HP PCL 5 (HP PCL 5 driver available from the Web only), HP postscript level 3 emulation, native PDF printing (v 1.4)		
Printer Smart Software Features	HP ePrint; HP Auto-On/Auto Off Technology; HP EcoSMART Console; HP FutureSmart Firmware; Walk-up USB; 4-line color display control panel; HP Web Jetadmin; HP Universal Print Driver (UPD); Hardware Integration Pocket; 10 Key control panel		
Printer Management	HP Web Jetadmin; HP SureSupply; HP Utility (Mac)		
Standard Connectivity	1 Hi-Speed USB 2.0; 1 Gigabit Ethernet; 2 External Host USB (1 walk-up and 1 external accessible); 2 internal Host USB 2.0-like ports (for 3rd party connection); 1 Hi-Speed USB 2.0 HIP (for 3rd party connection)		
Network Capabilities	Via HP Jetdirect Ethernet embedded print server (standard) supports: 10Base-T, 100Base-Tx, 1000Base-T; 802.3az (EEE) support on Fast Ethernet and Gigabit Ethernet; IPsec (standard); 802.11b/g/n wireless networking (optional)		
Network Ready	Standard (built-in Gigabit Ethernet)		
Wireless Capability	Optional, enabled with purchase of a hardware accessory		
Mobile Printing Capability	HP ePrint, Apple AirPrint™		
Memory	Standard: 512 MB; Maximum: 1 GB		
Processor Speed	800 MHz		
Duty Cycle	Monthly, A4: Up to 225,000 pages ³ ; Recommended Monthly Page Volume: 3000 to 15,000 ⁴		
Paper Handling	Input Capacities: 100-sheet multipurpose tray 1, 500-sheet input tray 2; Up to 600 sheets standard labels legal; Output Capacities: 500-sheet output bin; 100-sheet rear output bin; Up to 600 sheets (500 in the face down bin, 100 in rear face up door) standard labels legal; Duplex Options: Manual (driver support provided); Envelope Feeder: Yes, 75; Standard Paper Trays: 2; Media Types Supported: Paper (bond, color, letterhead, plain, preprinted, pre-punched, recycled, rough, light); envelopes; labels; cardstock; transparencies; shelf edge labels; user-defined; Media Weight Supported: Multipurpose tray 1: 60 to 200 g/m ² ; Tray 2, optional 500-sheet input tray, optional Custom media cassette, optional 1500-sheet High-capacity input tray; 60 to 120 g/m ² ; Optional Envelope feeder: 75 to 105 g/m ² ; Optional Duplexer: 60 to 120 g/m ² ; Media Sizes Supported: Multipurpose tray 1: A4, A5, A6, B5 (JIS), B6 (JIS), 16K, Dpostcard (JIS), executive (JIS), RA4, 10 x 15 cm, envelope (DL ISO, C5 ISO, C6 ISO, B5 ISO); Tray 2, optional 500-sheet input tray; executive (JIS), A4, A5, RA4, B5 (JIS), 16K; optional 1500-sheet High-capacity input tray; A4; Media Sizes Custom: Multipurpose tray 1: 76 x 127 to 216 x 356 mm; Tray 2, optional 500-sheet input tray: 148 x 210 to 216 x 356 mm; Optional Custom media cassette: 102 x 148 to 170 x 282 mm	Input Capacities: 100-sheet multipurpose tray 1, 500-sheet input tray 2, Automatic duplexer for two-sided printing; Up to 600 sheets standard labels legal; Output Capacities: 500-sheet output bin; 100-sheet rear output bin; Up to 600 sheets (500 in the face down bin, 100 in rear face up door) standard labels legal; Duplex Options: Automatic (standard); Envelope Feeder: Yes, 75; Standard Paper Trays: 2; Media Types Supported: Paper (bond, color, letterhead, plain, preprinted, pre-punched, recycled, rough, light); envelopes; labels; cardstock; transparencies; shelf edge labels; user-defined; Media Weight Supported: Multipurpose tray 1: 60 to 200 g/m ² ; Tray 2, optional 500-sheet input tray, optional Custom media cassette, optional 1500-sheet High-capacity input tray; 60 to 120 g/m ² ; Optional Envelope feeder: 75 to 105 g/m ² ; Duplexer: 60 to 120 g/m ² ; Media Sizes Supported: Multipurpose tray 1: A4, A5, A6, B5 (JIS), B6 (JIS), 16K, Dpostcard (JIS), executive (JIS), RA4, 10 x 15 cm, envelope (DL ISO, C5 ISO, C6 ISO, B5 ISO); Tray 2, optional 500-sheet input tray; executive (JIS), A4, A5, RA4, B5 (JIS), 16K; optional 1500-sheet High-capacity input tray; A4; Media Sizes Custom: Multipurpose tray 1: 76 x 127 to 216 x 356 mm; Tray 2, optional 500-sheet input tray: 148 x 210 to 216 x 356 mm; Optional Custom media cassette: 102 x 148 to 170 x 282 mm	Input Capacities: 100-sheet multipurpose tray 1, 500-sheet input tray 2, 500-sheet input tray 3, Automatic duplexer for two-sided printing; Up to 1100 sheets standard labels legal; Output Capacities: 500-sheet output bin; 100-sheet rear output bin; Up to 600 sheets (500 in the face down bin, 100 in rear face up door) standard labels legal; Duplex Options: Automatic (standard); Envelope Feeder: Yes, 75; Standard Paper Trays: 3; Media Types Supported: Paper (bond, color, letterhead, plain, preprinted, pre-punched, recycled, rough, light); envelopes; labels; cardstock; transparencies; shelf edge labels; user-defined; Media Weight Supported: Multipurpose tray 1: 60 to 200 g/m ² ; Tray 2, 3: 60 to 120 g/m ² ; optional Custom media cassette, optional 1500-sheet High-capacity input tray; 60 to 120 g/m ² ; Optional Envelope feeder: 75 to 105 g/m ² ; Duplexer: 60 to 120 g/m ² ; Media Sizes Supported: Multipurpose tray 1: A4, A5, A6, B5 (JIS), B6 (JIS), 16K, Dpostcard (JIS), executive (JIS), RA4, 10 x 15 cm, envelope (DL ISO, C5 ISO, C6 ISO, B5 ISO); Tray 2, 3: executive (JIS), A4, A5, RA4, B5 (JIS), 16K; optional 1500-sheet High-capacity input tray; A4; Media Sizes Custom: Multipurpose tray 1: 76 x 127 to 216 x 356 mm; Tray 2, 3: 148 x 210 to 216 x 356 mm; Optional Custom media cassette: 102 x 148 to 170 x 282 mm
Product Dimensions	WxDxH: 6.3 x 16.9 x 15.7 in; 415 x 428 x 398 mm Maximum: 6.3 x 30.2 x 15.7 in; 415 x 768 x 398 mm	WxDxH: 6.3 x 20 x 15.7 in; 415 x 508 x 398 mm Maximum: 6.3 x 30.2 x 15.7 in; 415 x 768 x 398 mm	WxDxH: 6.3 x 20 x 20.2 in; 415 x 508 x 513 mm Maximum: 6.3 x 30.2 x 20.2 in; 415 x 768 x 513 mm
Product Weight	23.7 kg; 52.1 lb	26.3 kg; 57.8 lb	32.8 kg; 72.1 lb
What's in the box	Printer; Right-angled power cord; Software and documentation on CD-ROM; HP Black LaserJet Toner cartridge (~10,000 pages); Getting Started Guide; Support flyer; HP ePrint flyer; Warranty Guide (where applicable) M602dn: plus automatic duplexer for two-sided printing; M602x: plus automatic duplexer for two-sided printing and 500-sheet input tray		
Warranty Features	One-year, next business day, on-site limited warranty		
Energy Efficiency Compliance	ENERGY STAR® qualified; EPEAT® Silver		
Control Panel	2.29 x 5.33 cm 4-line color LCD display, 3 LED lights (Attention, Data, Ready), buttons (Information, Stop/Cancel, Return, Home, Folder, Left Arrow), 10 numeric keys		
Display Description	4-line LCD (color text and graphics)		
Software Included	Windows Installer, HP PCL 6 discrete driver; Mac Installer, PostScript driver		
Fonts and Typefaces	105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript Level 3 emulation (Euro symbol built-in); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal Windows Vista 8 Fonts (Calibri, Cambria); additional font solutions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at hp.com/go/laserjetfonts		
Compatible Operating Systems	Windows 8, Windows 7, Windows Vista, Windows XP (SP2+), Windows Server 2003 (SP1+), Windows Server 2008 (all 32-bit and 64-bit), Windows Server 2008 R2 (64-bit); Mac OS X v10.5, 10.6, 10.7; Citrix and Windows Terminal Services (see System Administrator's Guide at hp.com/go/upd, Documentation tab for latest support); Novell (see novell.com/iprint for latest support); Linux (see hplip.net); UNIX (see hp.com/go/unix, hp.com/go/unixmodelscripts, and hp.com/go/jetdirectunix_software); SAP device types (see hp.com/go/sap/drivers and hp.com/go/sap/print)		
Compatible Network Operating Systems	Windows 8, Windows 7, Windows Vista, Windows XP (SP2+), Windows Server 2003 (SP1+), Windows Server 2008 (all 32-bit and 64-bit), Windows Server 2008 R2 (64-bit); Mac OS X v10.5, 10.6, 10.7; Citrix and Windows Terminal Services (see System Administrator's Guide at hp.com/go/upd, Documentation tab for latest support); Novell (see novell.com/iprint for latest support); Linux (see hplip.net); UNIX (see hp.com/go/unix, hp.com/go/unixmodelscripts, and hp.com/go/jetdirectunix_software); SAP device types (see hp.com/go/sap/drivers and hp.com/go/sap/print)		
Minimum System Requirements	PC: Windows 8, Windows 7, Windows Vista, Windows XP (SP2 or higher), Windows Server 2003 (SP1 or higher), Windows Server 2008, Windows Server 2008 R2; 200 MB available hard disk space; operating system compatible hardware system requirements, see microsoft.com; MAC: Mac OS X v10.5, 10.6, 10.7; 150 MB available hard disk space; operating system compatible hardware system requirements, see: apple.com		
Power	Power Supply Type: Internal (Built-in) power supply; Power Requirements: 110-volt input voltage: 100 to 127 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz); (Option #AZZ) 220-volt input voltage: 220 to 240 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, power supply varies by part number with # Option code identifier); Power Consumption: 820 watts (Printing), 21 watts (Ready), 5.5 watts (Sleep), 1.0 watt (Auto-Off), 0.3 watts (Manual-Off) ⁵	Power Supply Type: Internal (Built-in) power supply; Power Requirements: 110-volt input voltage: 100 to 127 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, power supply varies by part number with # Option code identifier); Power Consumption: 820 watts (Printing), 21 watts (Ready), 5.5 watts (Sleep), 1.0 watt (Auto-Off), 0.3 watts (Manual-Off) ⁵	
Acoustics	Acoustic Power Emissions: 7.0 B(A); Acoustic Pressure Emissions: 56 dB(A)		
Operating Environment	Operating Temperature Range: 15 to 32°C; Recommended Operating Temperature: 30 to 60°C; Storage Temperature Range: -30 to 60°C; Non-Operating Humidity Range: 10 to 90% RH; Operating Humidity Range: 10 to 80% RH; Recommended Humidity Operating Range: 10 to 80% RH		
Security Management	Management security: SNMPv3, SSL/TLS, WPA2-Enterprise, 802.1X authentication (EAP-PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Certificate, Pre-Shared Key Authentication, and Kerberos Authentication; Support for WJA-10 IPsec Configuration using IPsec Plug-in		

¹Measured using ISO/IEC 24734, excludes first set of test documents. For more information see hp.com/go/printerdaims. Exact speed varies depending on the system configuration, software application, driver, and document complexity. ²First page out time is measured from Tray 2. Exact speed varies depending on the system configuration, software application, driver and document complexity. ³Duty cycle is defined as the maximum number of pages per month of imaged output. This value provides a comparison of product robustness in relation to other HP LaserJet or HP Color LaserJet devices, and enables appropriate deployment of printers and MFPs to satisfy the demands of connected individuals or groups. ⁴HP recommends that the number of printed pages per month be within the stated range for optimum device performance, based on factors including supplies replacement intervals and device life over an extended warranty period. ⁵Power requirements are based on the country/region where the printer is sold. Do not convert operating voltages; this will damage the printer and void the product warranty. Power consumption in Auto-Off mode depends on customer network switch capability, user configuration and network activity. Off-mode power may vary while checking network packets for print jobs.

Learn more at hp.com

© Copyright 2011–2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Microsoft, Windows, and Windows XP are registered trademarks of Microsoft Corporation. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

